


TECHNICAL DATA	
O. RING	EPDM
SLIPPER	PTFE+CARBON FIBER
INLET FILTER	700 MICRON
NOZZLES POSITIONS	2 - 4
NOZZLES CIRCLE	ON REQUEST
NOZZLES THREAD	1/4"NPT
MAX OPERATING FLOW	60 L/MIN
MAX OPERATING PRESSURE	200 bar
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
DIFFUSER POSITION	SEE CHART
ROTATION SPEED	SEE CHART
WEIGHT	7.1 KG



FLOW L/MIN		DIFFUSER POSITION			
		1	2	3	4
15	78		36		
30			90	42	
45				72	42
60				96	60
		SPINNING SPEED RPM			

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
	FOGLIO	xxxx				
GREZZO	DATA	xx.xx.xx				
	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
SGROSS.	0÷6	6÷30	30÷120	120÷400	400÷1000	1000÷2000
	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
Δ = Δ	NOTE: VERSION 05					
FINITURA	MATERIALE: INOX					
ΔΔ = Δ						
RETTIFICA	DESCRIZIONE: PW 060 SP					
ΔΔΔ = Δ	APPLICATION DRAWING					
ΔΔΔ = Δ						
 CLEANING HEADS MONTECCHIO E. (RE) - ITALY						
CODICE:						
PW 060 SP						

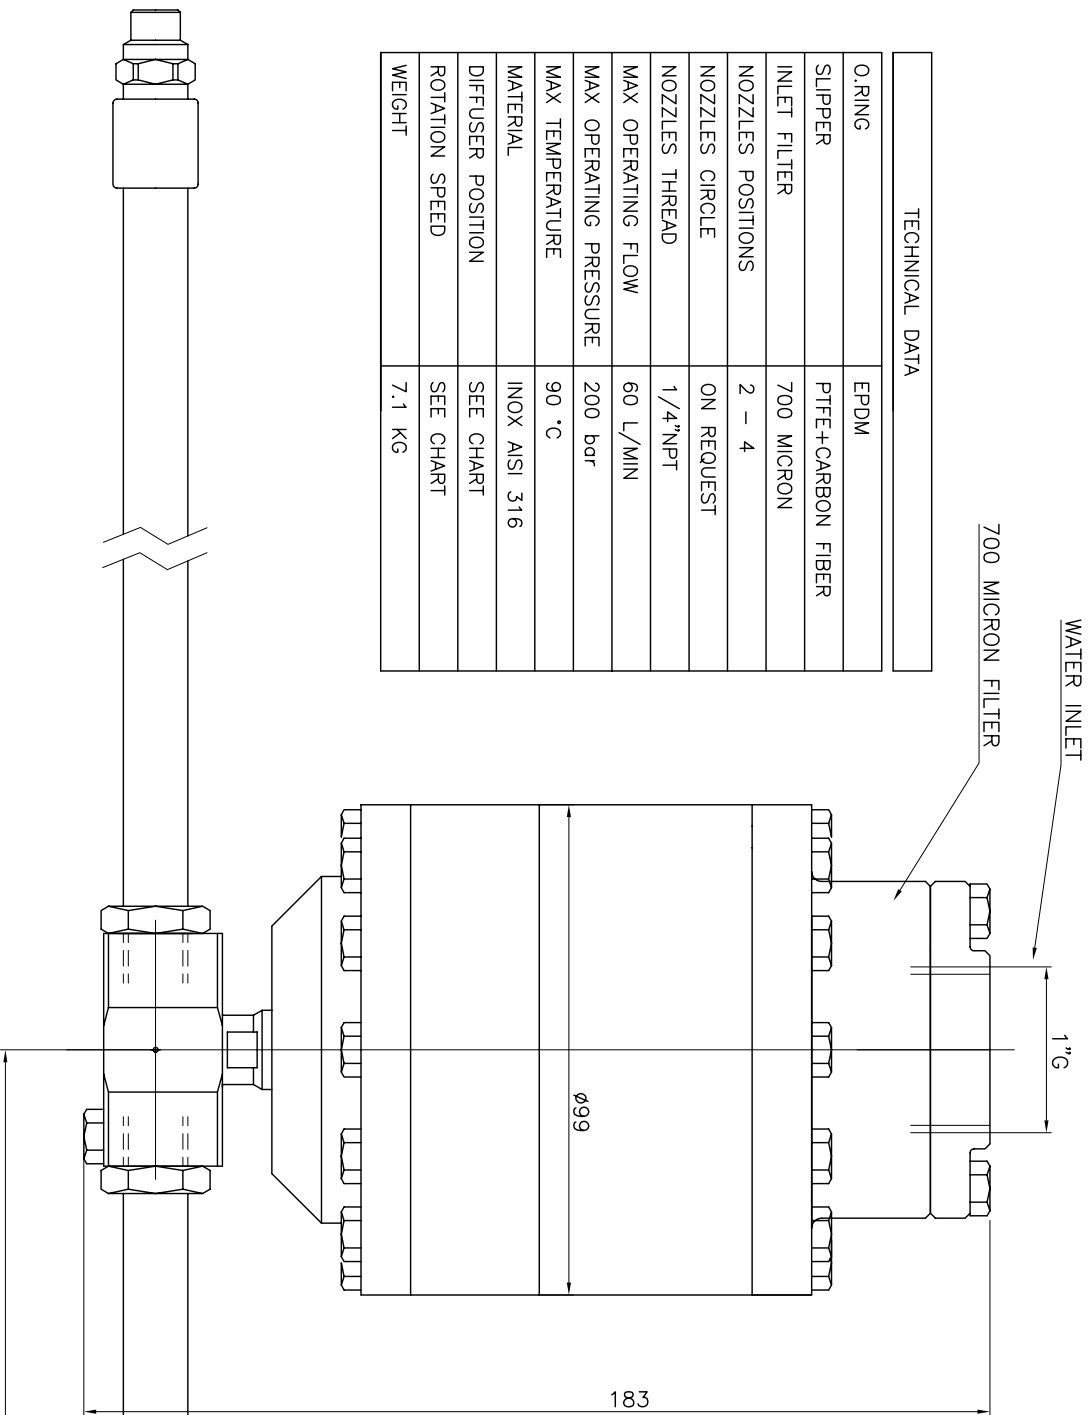

DISEGN.: CR | CONTR.: DM
DATA: 21.11.08
SCALA: 1:1 | A3 | 0