
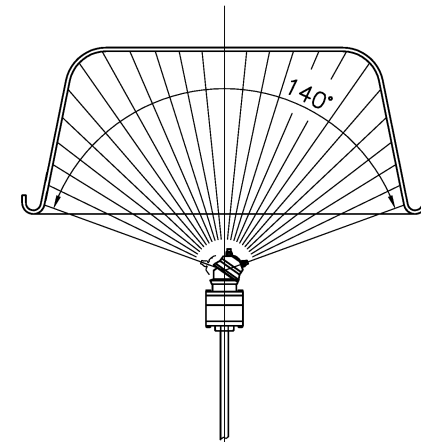


242

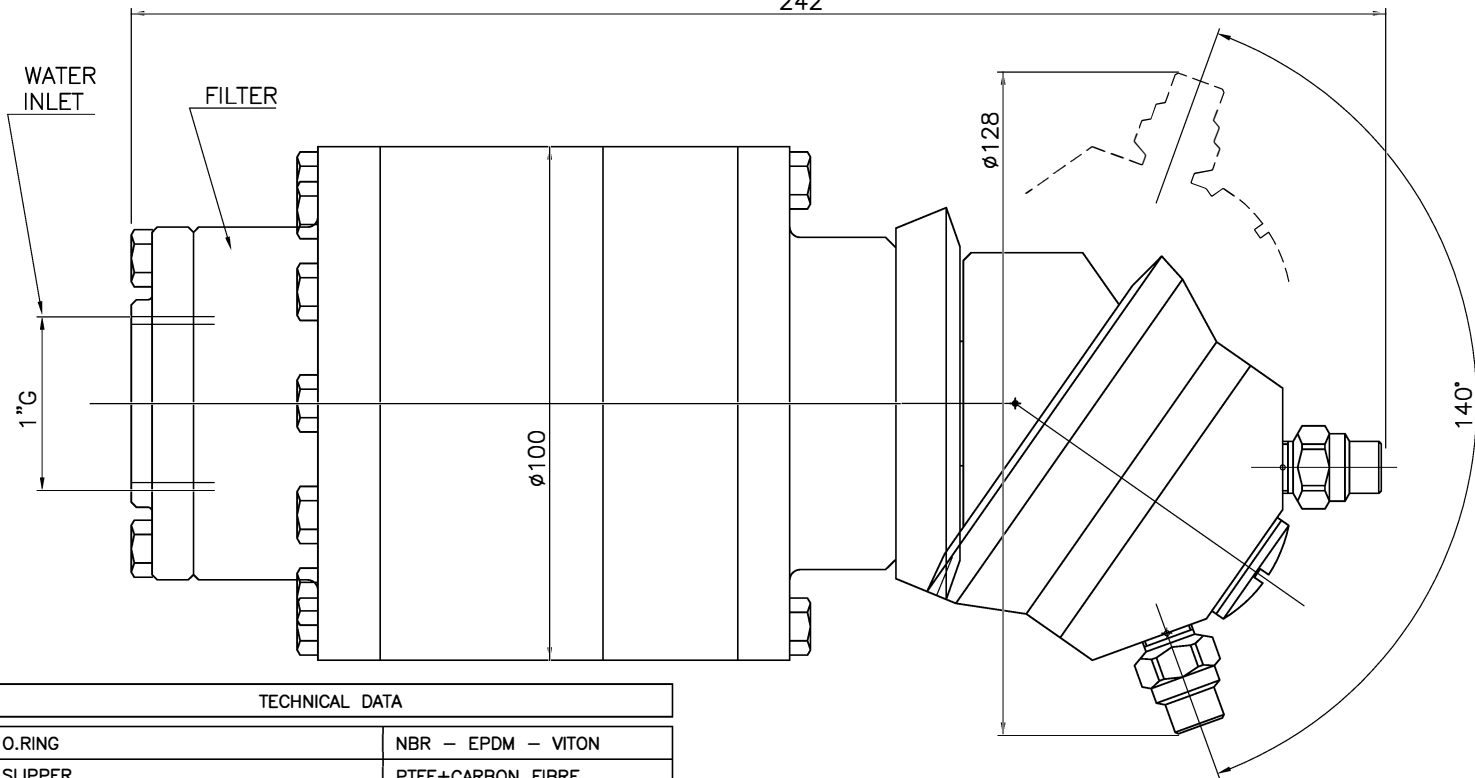

TECHNICAL DATA

O.RING	NBR - EPDM - VITON
SLIPPER	PTFE+CARBON FIBRE
BUSHING	AISI 316
FILTER	700 MICRON
NOZZLES POSITIONS	2 - 4
NOZZLES THREAD	1/8"NPT
TESTING NOZZLES	0 x 0000
OPERATING FLOW RANGE	15 - 60 L/min
TESTING FLOW	00 L/min
OPERATING PRESSURE RANGE	5 - 200 bar
TESTING PRESSURE	000 bar
CENTER LINE MIN PASS THROUGH HOLE	128 mm
MANUAL MIN PASS THROUGH HOLE	100 mm
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
CONICAL GEARS	FIXED Z=37 ROTATING Z=39
MODULE	2
DIFFUSER SPEED SETTING POSITIONS	4
TESTING DIFFUSER POSITION	X
ROTATION SPEED	SEE CHART
FULL CYCLE	39 ROTATIONS
FULL CYCLE TIME	26 sec. AT 90 RPM
WEIGHT	9.6 KG

FLOW L/MIN	DIFFUSER POSITION			
	1	2	3	4
15	78	36		
30		90	42	
45			72	42
60			96	60
	SPINNING SPEED		RPM	

file: SW 060WKC 01 cm1

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5	 CLEANING HEADS MONTECCHIO E. (RE) - ITALY
FOGLIO DATA	xxxx						
GREZZO	TOLLERANZE GENERALI classe m UNI-EN 22768/1						DISEGN.: CR CONTR.: DM DATA: 16.02.09 MOD. SCALA: 1:1 A3 0
~ = ✓	0±6	6±30	30±120	120±400	400±1000	1000±2000	
SGROSS. ∇ = 3.2/∇	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	CODICE: SW 060WKC 01
FINITURA ∇∇ = 1.6/∇	MATERIALE: AISI 304						
RETTIFICA ∇∇∇ = 0.8/∇	DESCRIZIONE: SW060 WKC 01 cm1 WITH FILTER FRONTAL PATTERN 140°						